


FLEXADUX® PU 2.5 ECO

Very heavy weight Polyurethane hose

- Applications** roof graveling, gravel conveying, conveying of rubble, construction machines, conveying of abrasive media
- Structure** TPU / Polyether-Polyurethane, uncolored, clear, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** excellent abrasion resistance, good tensile strength, crush-resistant, very high vacuum resistance, very high pressure resistance, very smooth inside, corrugated outside, good oil & petrol resistance
- Optional**
 - flame retardant
 - permanently antistatic
 - or both in combination

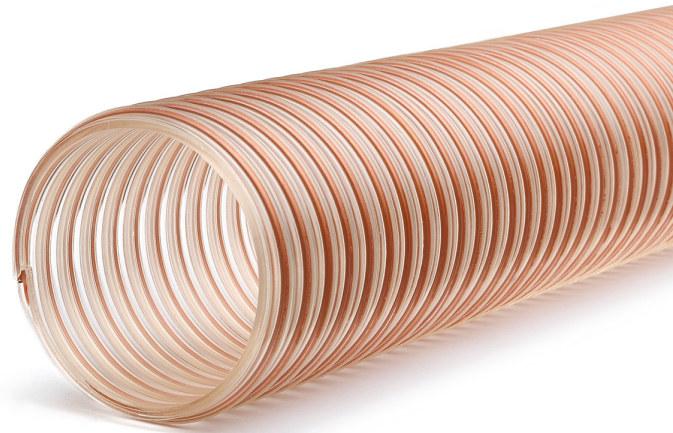

**made
in
Germany**

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Betriebsdruck Max. (bar)	Vakuum Max. (bar)	Weight (kg/m)	Article Number
40	58	2,50	100	3,30	0,95	0,71	37402040
45	63	2,50	113	3,10	0,95	0,80	37402045
50	69	2,50	125	3,02	0,95	0,89	37402050
60	78	2,50	150	2,70	0,95	1,18	37402060
80	99	2,50	200	2,08	0,95	1,57	37402080
140	134	2,50	350	1,44	0,90	2,59	37402140
200	97	2,50	500	1,09	0,65	3,74	37402200